


1		2		3	4	5	6
L(m)	Tolerance(mm)	Technical specification					
L<1	+50	Insertion loss(dB)	≤0.2				
1≤L<15	+100	Return loss(dB)	≥50				
15≤L<30	+150	Wavelength(nm)	1310&1550				
L≥30	+400						

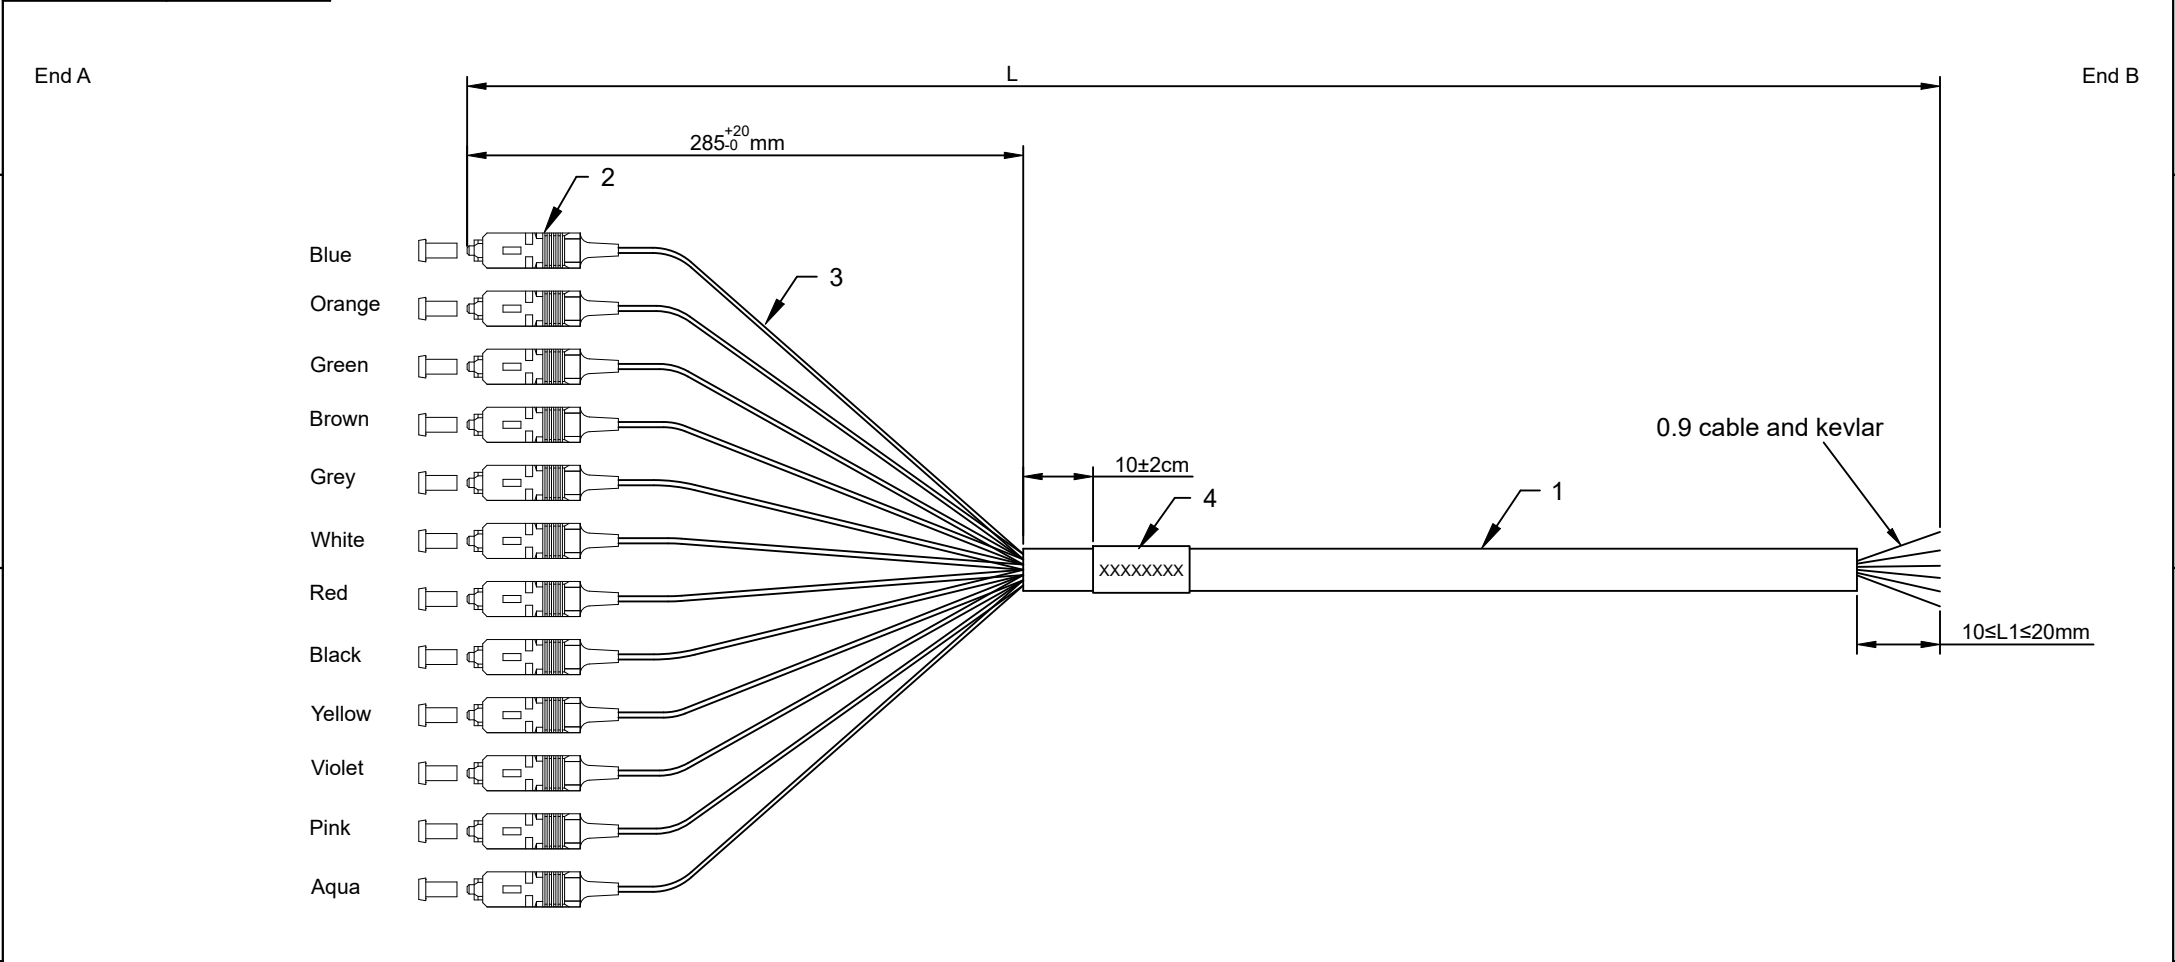

						SIGNATURE	DATE		LYNN LYNN					
4		Cable Label	1	EA	DRAWN		T. Hodson	2026/03/11	MAT'L		CUSTOMER NO.	T12-SU119-BL-SRD-xxxM		
3		Ø0.9mm 12 Colors Subunits	A/R	EA	CHK'D		J. Farrell	2026/03/11	UNITS	mm	PRODUCT NAME	Pigtail SC(UPC) 12F G657A1		
2		SC/UPC SM Simplex 0.9mm Connector (Blue Housing 15mm Blue Short Boot)	12	EA	PROCESS		C. Branden	2026/03/11	SCALE		DRAWING NO.	T12-SU119-BL-SRD-xxxM		
1		OD:5.5mm, Singlemode 9/125 G657A1,YOFC 12 Fibers Distribution Cable,PVC_OFNR, Color: Yellow	A/R	m	APPV'D		C. Hoskins	2026/03/11	TYPE OF PROJECTION			SHEET 1 OF1	REV	A1
ITEM	P/N	SPECIFICATION	QTY	U/M										

1	2	3	4	5	6
---	---	---	---	---	---