




REV	MODIFICATION	UPDATE DATE	SIGNATURE

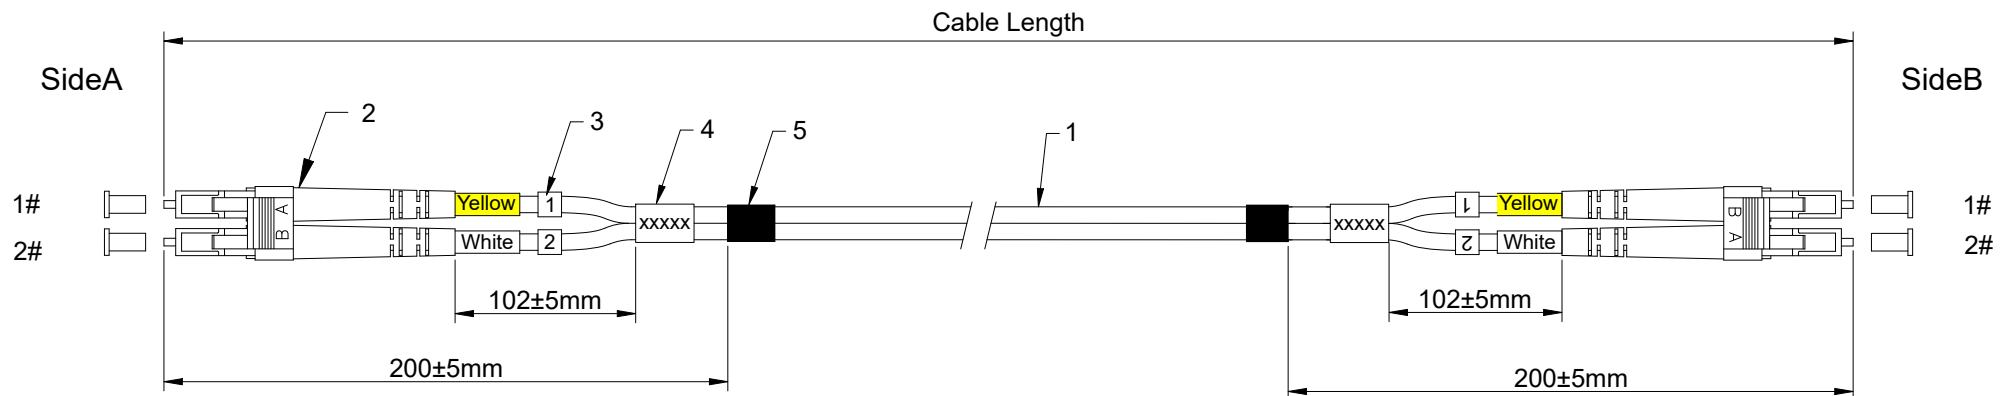

Notes:

1. Width: 25mm, Length: 30mm.
2. P/N: LYNN Part Number
3. Bar Code: Code 128 Auto
Print: xxxxxxxzzzzzz
4. S/N: xxxxxxxzzzzzz, e.g. A083930000001.
X: manufacture location.
yyyyyy: Internal work order code.
zzzzzz: Incrementing serial code.

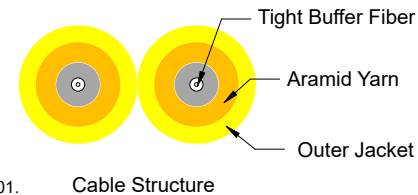

NOTES:
1.Insertion loss $\leq 0.2\text{dB}$
2.Return loss $\geq 60\text{dB}$

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

5	2		Black Shrinkage Tube				Requirements Of Cable							
4	2		Cable Label				Cable Type				Fiber Type	G657A1 Corning		
3	4		Cable Marker				Cable Diameter		2.0mm	Attenuation	@1310nm ≤ 0.4dB/km			
2	2		LC/APC SM 2.0mm Duplex Connector(Green Housing Green Boot)				Cable Material		OFNR		@1550nm ≤ 0.3dB/km			
1	A/R		OD: 2.0mm,Singlemode 9/125 G657A1,Corning Fiber,Fiber Optic Cable,Duplex, OFNR,Color:Yellow				Tensile Strength	Long Term	70 N	Crush Resistance	Long Term		100 N/100mm	
								Short Term	150 N		Short Term		500 N/100mm	
ITEM	QTY	P/N	SPECIFICATION				Bending Radius	Static	10 D	Temperature Range	Storage Temperature		-20℃ ~ +70℃	
								Dynamic	20D		Operating Temperature		-10℃~ +60℃	
			DRAW	C. Brandenburg	DATE	22-07-2024		TITLE: Fiber Optic patch Cord LC/APC-LC/APC Duplex Singlemode						
			CHECK		APPROVED		CUSTOMER NO			DWG NO			REV	A
1			2			3		4			5		6	