




5		6	
REV	MODIFICATION	UPDATE DATE	SIGNATURE

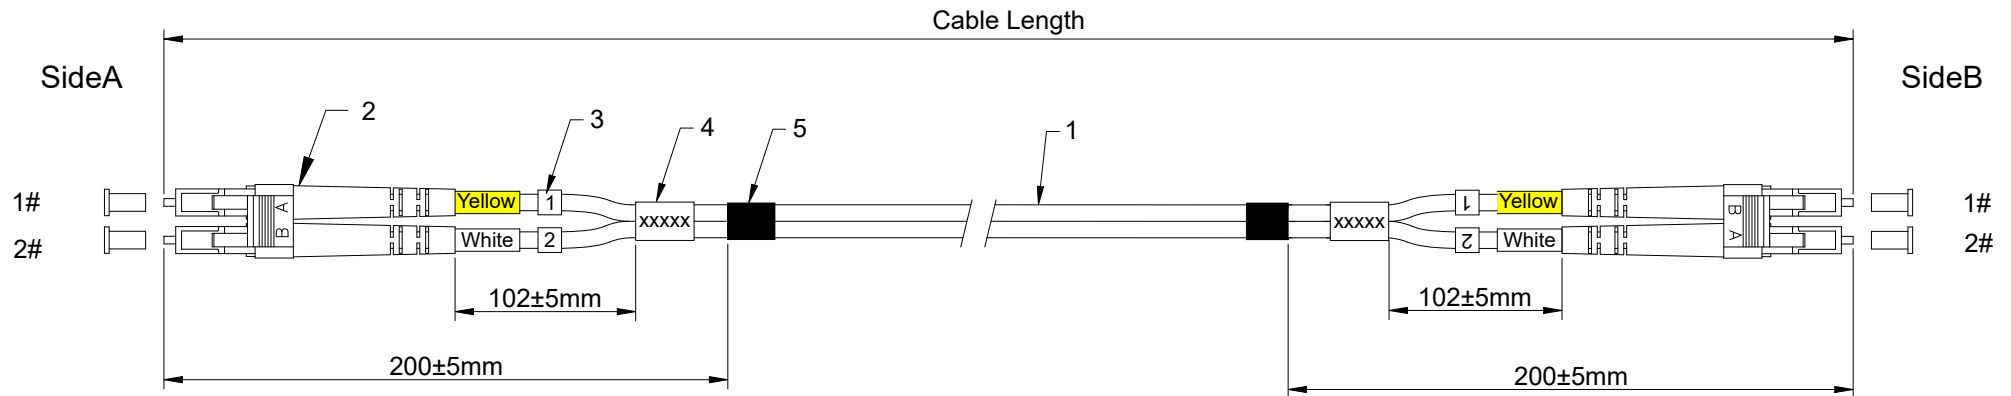

Notes:

1. Width: 25mm, Length: 30mm.
2. P/N: LYNN Part Number
3. Bar Code: Code 128 Auto
Print: xxxxxxxzzzzzz
4. S/N: xxxxxxxzzzzzz, e.g. A083930000001.
X: manufacture location.
yyyyyy: Internal work order code.
zzzzzz: Incrementing serial code.

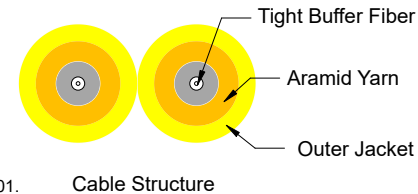

NOTES:

- 1.Insertion loss $\leq 0.2\text{dB}$
- 2.Return loss $\geq 55\text{dB}$

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

5	2		Black Shrinkage Tube				Requirements Of Cable								
4	2		Cable Label	Cable Type					Fiber Type		G657A1 Corning				
				Cable Diameter		2.0mm	Attenuation	@1310nm ≤ 0.4dB/km							
				Cable Material		OFNR		@1550nm ≤ 0.3dB/km							
				Tensile Strength		Long Term	70 N	Crush Resistance	Long Term		100 N/100mm				
2		2		LC/UPC SM 2.0mm Duplex Connector(Blue Housing White Boot)		Short Term	150 N		Short Term		500 N/100mm				
1	A/R		OD: 2.0mm,Singlemode 9/125 G657A1,Corning Fiber,Fiber Optic Cable,Duplex,OFNR,Color:Yellow				Bending Radius		Static	10 D	Temperature Range	Storage Temperature		-20°C ~ +70°C	
ITEM	QTY	P/N	SPECIFICATION				Dynamic		20D			Operating Temperature		-10°C~ +60°C	
			DRAW	C. Brandenburg	DATE	22-07-2024		TITLE: Fiber Optic patch Cord LC/UPC-LC/UPC Duplex Singlemode							
			CHECK		APPROVED		CUSTOMER NO			DWG NO				REV	A
1			2				3		4		5		6		