
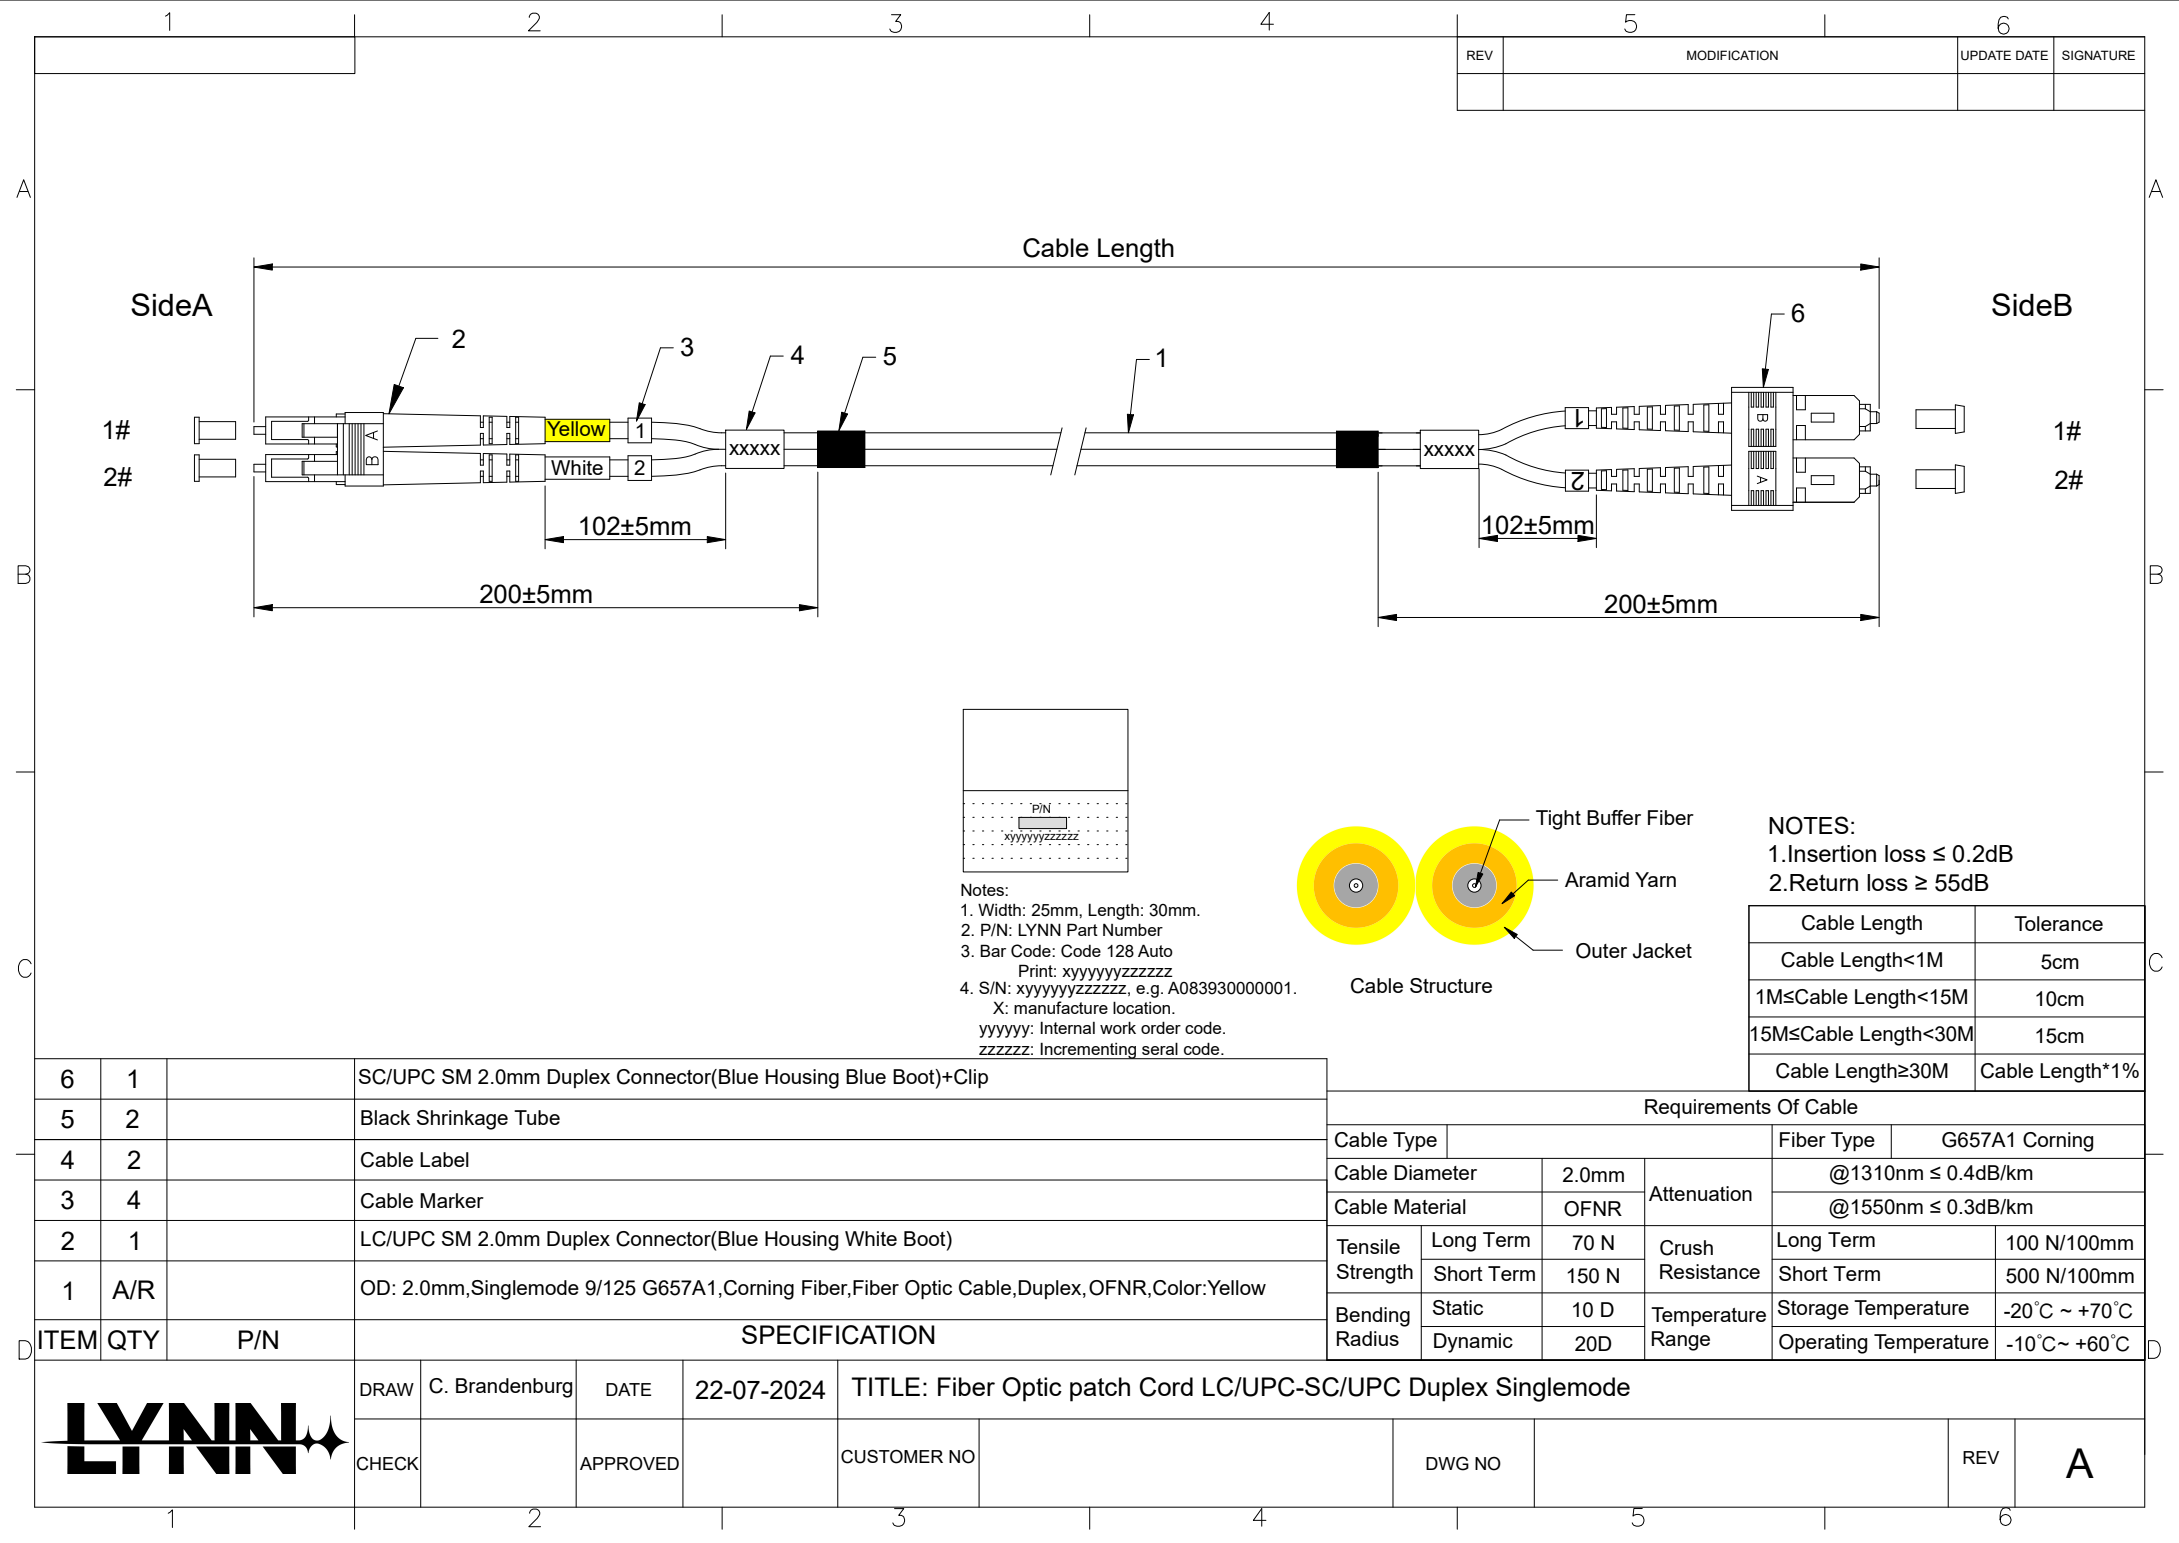


Notes:
1. Width: 25mm, Length: 30mm.
2. P/N: LYNN Part Number
3. Bar Code: Code 128 Auto
Print: xxxxxxxxxx
4. S/N: xxxxxxxxxx, e.g. A083930000001.
X: manufacture location.
yyyyyy: Internal work order code.
zzzzzz: Incrementing serial code.

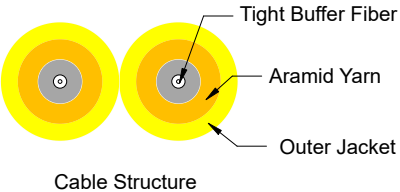

NOTES:
1.Insertion loss ≤ 0.2dB
2.Return loss ≥ 55dB

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

6	1	SC/UPC SM 2.0mm Duplex Connector(Blue Housing Blue Boot)+Clip
5	2	Black Shrinkage Tube
4	2	Cable Label
3	4	Cable Marker
2	1	LC/UPC SM 2.0mm Duplex Connector(Blue Housing White Boot)
1	A/R	OD: 2.0mm,Singlemode 9/125 G657A1,Corning Fiber,Fiber Optic Cable,Duplex, OFNR,Color:Yellow

Requirements Of Cable					
Cable Type		Fiber Type		G657A1 Corning	
Cable Diameter		2.0mm	Attenuation	@1310nm ≤ 0.4dB/km	
Cable Material		OFNR		@1550nm ≤ 0.3dB/km	
Tensile Strength	Long Term	70 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	150 N		Short Term	500 N/100mm
Bending Radius	Static	10 D	Temperature Range	Storage Temperature	-20℃ ~ +70℃
	Dynamic	20D		Operating Temperature	-10℃~ +60℃

ITEM	QTY	P/N	SPECIFICATION							
			DRAW	C. Brandenburg	DATE	22-07-2024	TITLE: Fiber Optic patch Cord LC/UPC-SC/UPC Duplex Singlemode			
			CHECK		APPROVED		CUSTOMER NO		DWG NO	
									REV	A