


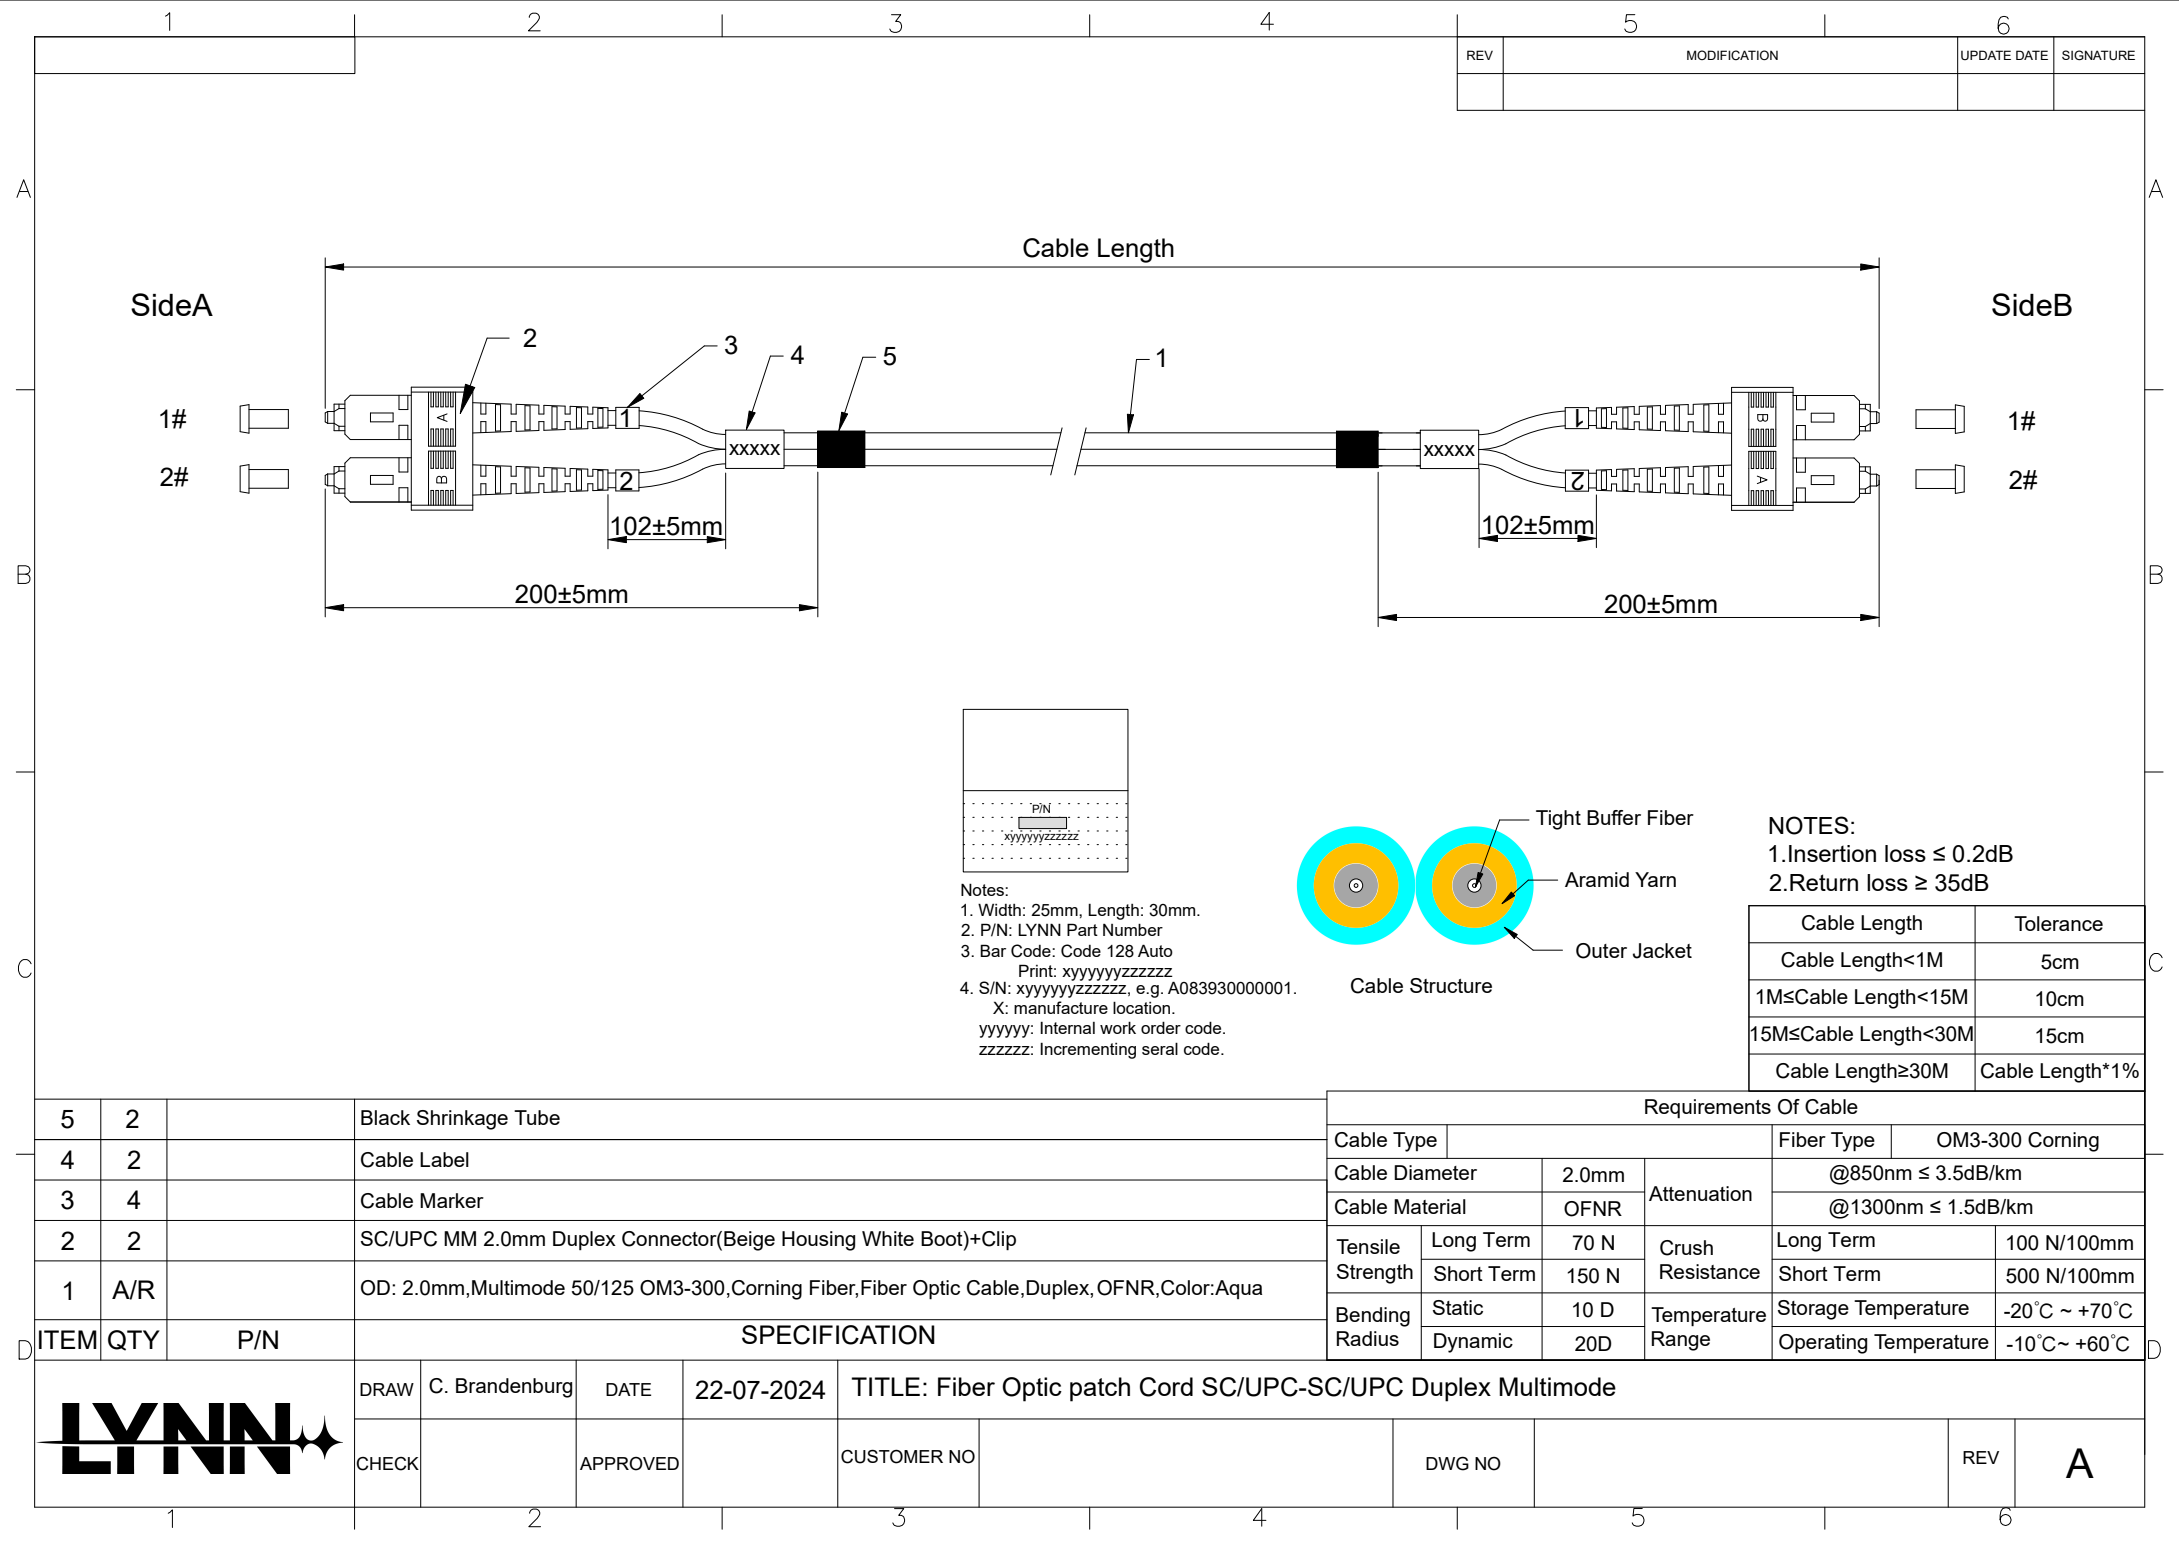

REV	MODIFICATION	UPDATE DATE	SIGNATURE

5	2		Black Shrinkage Tube
4	2		Cable Label
3	4		Cable Marker
2	2		SC/UPC MM 2.0mm Duplex Connector(Beige Housing White Boot)+Clip
1	A/R		OD: 2.0mm,Multimode 50/125 OM3-300,Corning Fiber,Fiber Optic Cable,Duplex,OFNR,Color:Aqua

Requirements Of Cable					
Cable Type			Fiber Type		
Cable Diameter			OM3-300 Corning		
Cable Material			@850nm ≤ 3.5dB/km		
Tensile Strength			@1300nm ≤ 1.5dB/km		
Bending Radius	Long Term	70 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	150 N		Short Term	500 N/100mm
Static	10 D	Temperature Range	Storage Temperature		
	20D		Operating Temperature		

ITEM	QTY	P/N	SPECIFICATION			
DRAW			C. Brandenburg	DATE	22-07-2024	TITLE: Fiber Optic patch Cord SC/UPC-SC/UPC Duplex Multimode
CHECK			APPROVED	CUSTOMER NO	DWG NO	REV A