


Product Description

FPP-12S-W-16 by LYNN incorporates high impact plastic that is ultraviolet and water resistant. The FPP-12S-W-16 can be used for wall mounted and pole installation.

A flexible rubber jam and waterproof joint work together to create sustainable cable entries. The enclosure is suitable for 2.0mm or 3.0mm pigtail or drop cable.

Suitable for applications such as: FTTH Access Network, Telecommunications Network, CATV Networks, Data Communications Networks.

Product Photo

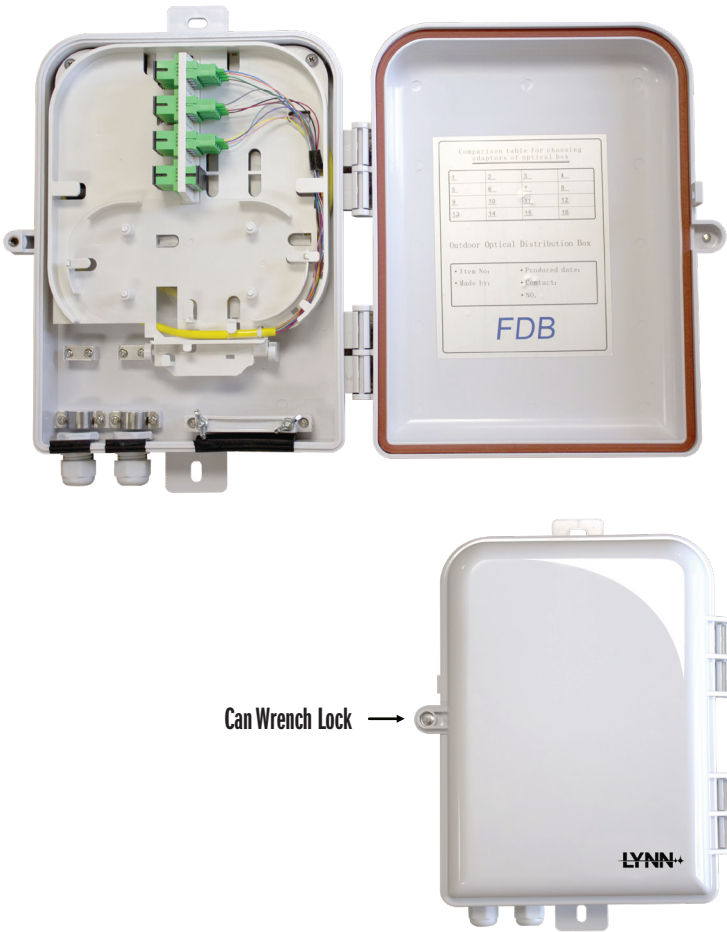

Foam Circles



Silver Screws



Zip Ties (4)



Tubes (2)



Small Screws




Splice Sleeves

Installation Procedure

1. When stripping the cable, take out the right fiber Cable. Insert it into the box through waterproof joint, and set the cable onto the cable fixing point and set the fiber onto the fiber fixing point.

Cable Fixing Point

Fiber Fixing Point

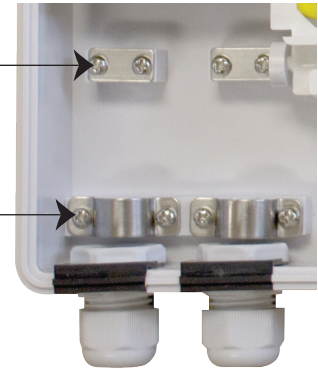

2. Then insert the stripped cable into the fiber protection sleeve and guide to the bottom of the splice tray, and splice with the fiber pigtail in the splicing area and cover the clear lid in order not to cause the breakaway.

