


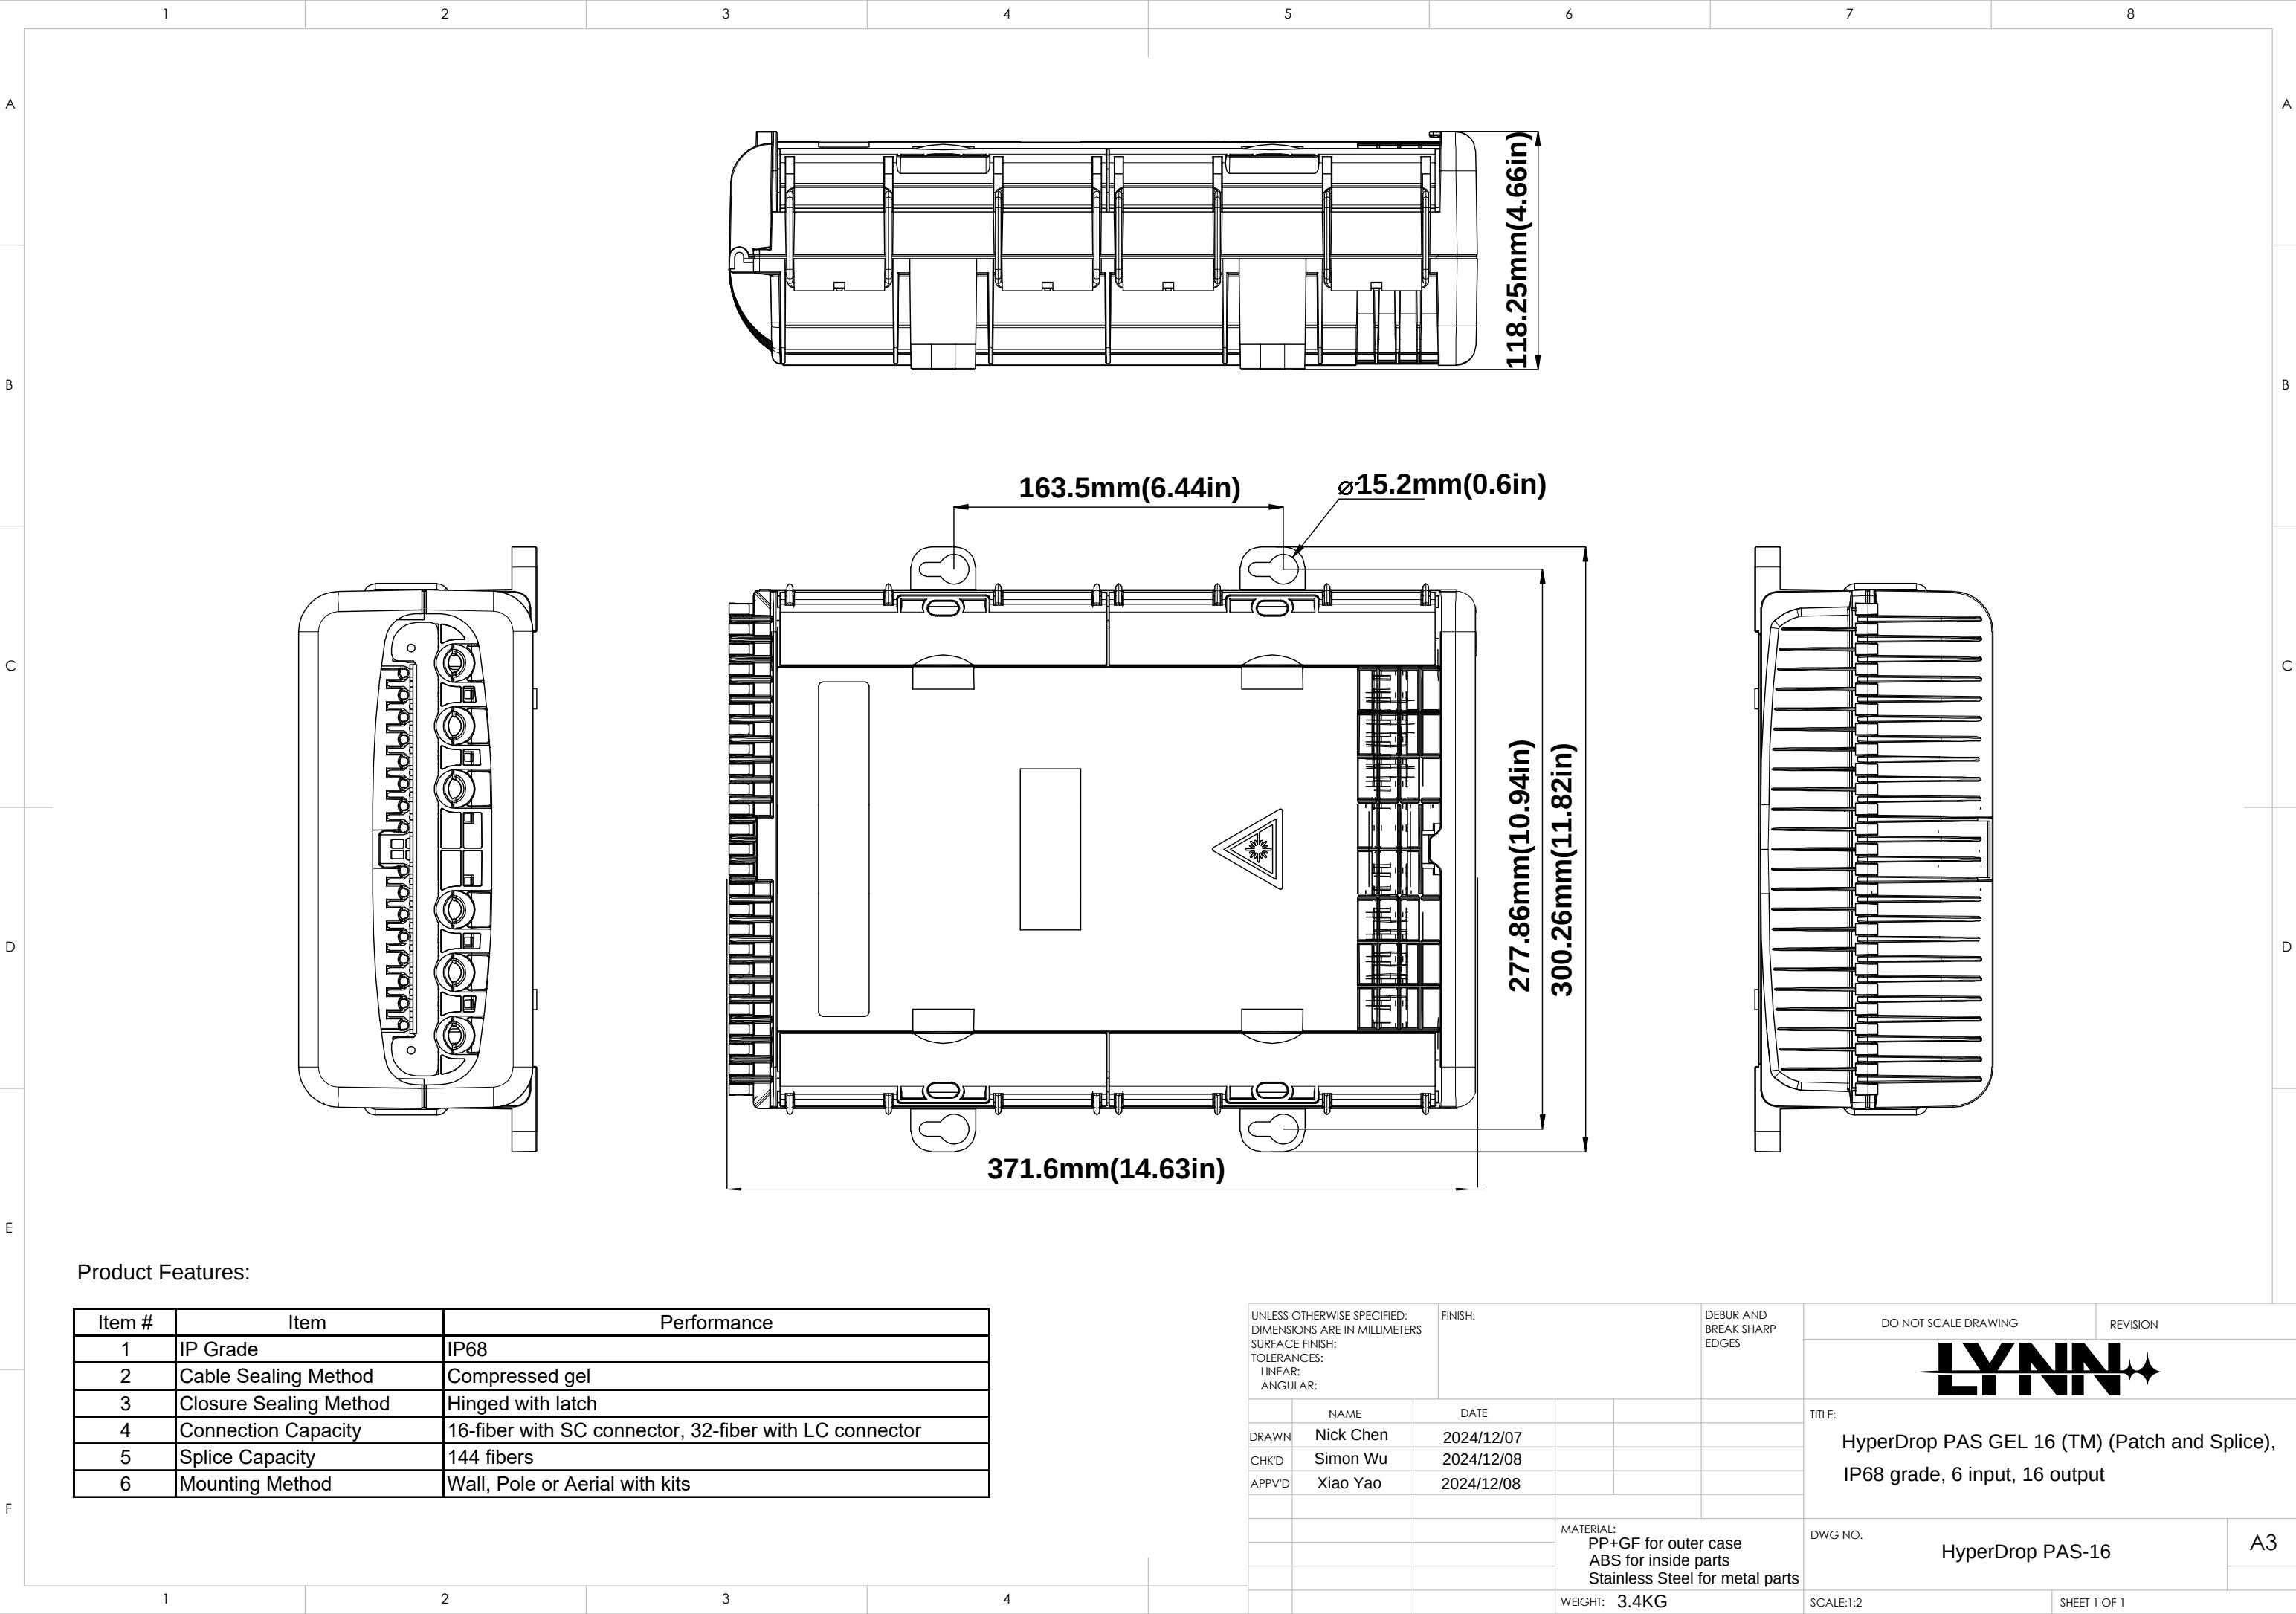

Product Features:

Item #	Item	Performance
1	IP Grade	IP68
2	Cable Sealing Method	Compressed gel
3	Closure Sealing Method	Hinged with latch
4	Connection Capacity	16-fiber with SC connector, 32-fiber with LC connector
5	Splice Capacity	144 fibers
6	Mounting Method	Wall, Pole or Aerial with kits

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:			FINISH:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
							LYNN		TITLE: HyperDrop PAS GEL 16 (TM) (Patch and Splice), IP68 grade, 6 input, 16 output	
DRAWN	NAME	DATE				DWG NO.		HyperDrop PAS-16		A3
CHK'D	Simon Wu	2024/12/08				MATERIAL: PP+GF for outer case ABS for inside parts Stainless Steel for metal parts		SHEET 1 OF 1		
APPV'D	Xiao Yao	2024/12/08								
						WEIGHT: 3.4KG		SCALE:1:2		