



The **TheNID™ Basic** is a compact, cost-effective outdoor fiber network interface device (NID) designed for straightforward FTTH and FTTx deployments. It provides the essential fiber splicing, termination, and cable management features installers need while delivering reliable protection in harsh outdoor environments, making it an ideal solution for entry-level fiber deployments.


- **Lower Deployment Costs:** Affordable NID designed for entry-level FTTH and FTTx installations.
- **Built for Outdoor Reliability:** Durable IP55-rated, UV-resistant housing safeguards fiber connections in demanding outdoor environments.
- **Simplify Installation:** Supports both flat and round drop cables for flexible deployment options.
- **Protect Fiber Connections:** Organizes and secures up to two single fusion splices or one mass fusion splice/PLC splitter.
- **Ready to Deploy:** Includes one pre-installed simplex SC/APC adapter for quick fiber termination.
- **Flexible Cable Entry:** Accepts up to one inch conduit to accommodate a variety of installation methods.

FPP-TN-BM-K9

TheNID Basic Indoor/Outdoor Wall Mount Fiber Patch Panel, 1 simplex SC APC installed, 1 simplex SC APC pigtail included, can splice up to 2 single fibers and 1 mass fusion, can hold 1 PLC splitter

Technical Specifications

General	Dimensions (L*W*H)	7.87in x 6.38in x 2.91in
	Product Material	Light gray ABS and PC (poly-carbonate) blend
	Supported Cable Sizes	Round OD: 3mm to 16.2mm Flat OD: 2mm to 8.1 x 4.5mm
	Operating Temperature Range	-20° C to 80° C (-4° F to 176° F)
	Country of Origin	China
	UPC	043404011814
Accessories	4in zip ties (4ea)	
	6in zip ties (2ea)	

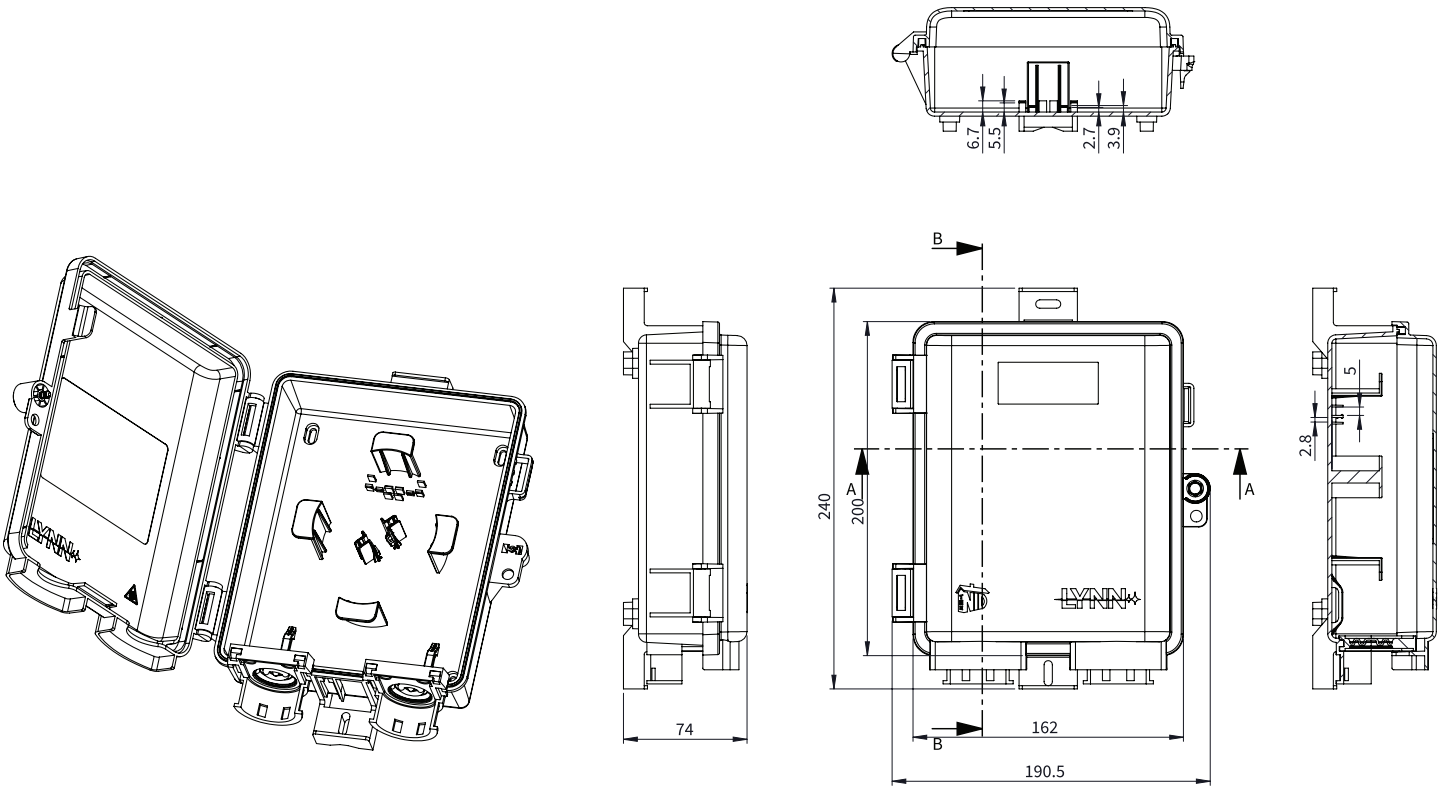

Ask us about our custom engraving!