

REV.	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE PER TJEECR-140	WANGSUFANG 11/26/14'	WUJUN	WUJUN
B	RELEASE PER TJEECR-150 △B X1	FANMEIYING 08/10/15'	WUJUN	WUJUN
C	RELEASE PER TJEECR-170 △C X3	HUANGMAN 03/08/17'	WUJUN	WUJUN



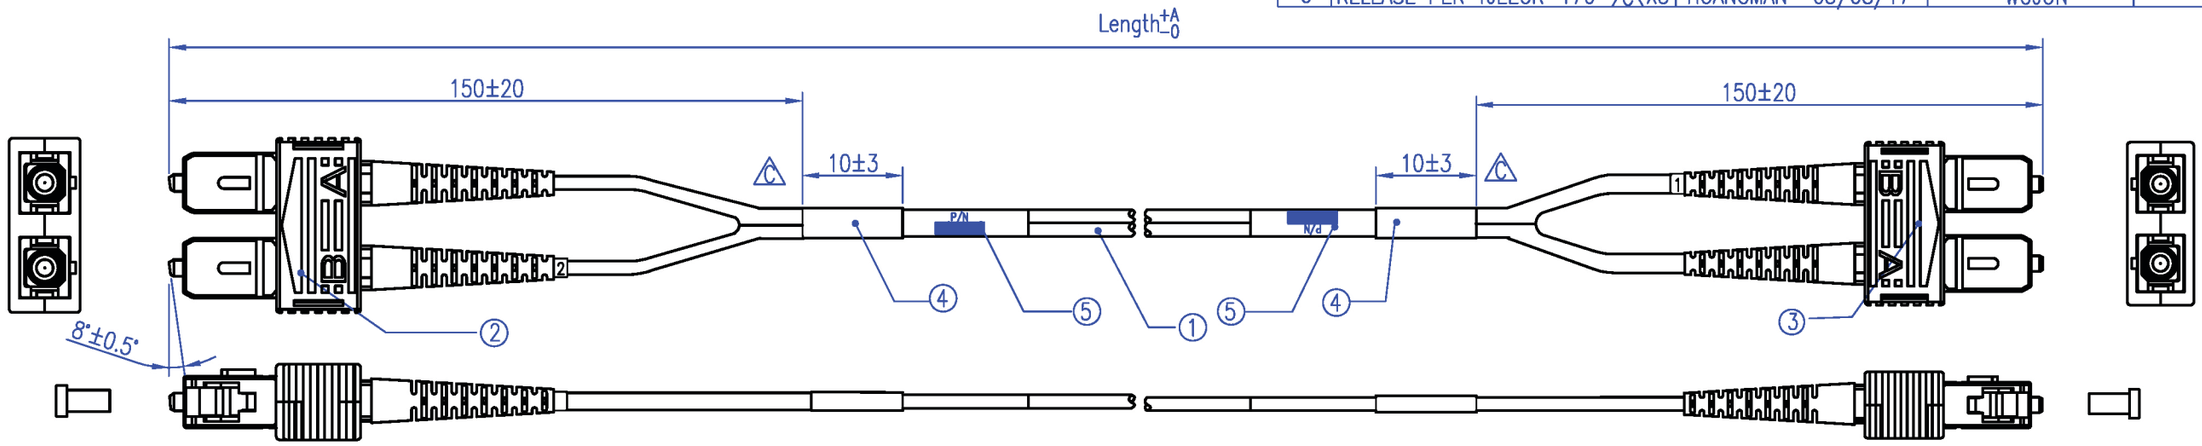

Notes:
1.0. Insertion Loss: <=0.25dB (1310nm)
2.0. Return Loss: >=55dB (1310nm)
APC: >=60dB (1310nm)



Notes: 1. Width: 25mm, Length: 26mm.
2. P/N: TOTAL CABLE SOLUTIONS P/N
3. Bar Code: Code 128 Auto
Print: xyyyyyzzzzz
4. S/N: xyyyyyzzzzz, e.g. A0839300001.
X: manufacture location.
yyyyy: Internal work order code.
zzzzz: Incrementing seral code.

TABLE B

TCS P/N	
D-SA2SU2-SR2-xxxM	
NOTE: "xxx" = 3-DIGIT LENGTH	LENGTH(M)

Tolerance

L>100	1%
50<=L<=100	1.00
30<=L<50	0.18
10<=L<30	0.16
3<=L<10	0.14
1<=L<3	0.12
L<1	0.10
LENGTH(M)	A(M)

TABLE A

ITEM#	QTY	DESCRIPTION
⑤	A/R	CABLE LABEL, WRAPPED TIGHTLY AROUND.
④	A/R	HEAT SHRINK TUBE, BLACK
③	1	CONNECTOR, SC, DUPLEX, SINGLE-MODE, BLUE COUPLING & BOOTS & CLIP
②	1	CONNECTOR, SC/APC, CONE, DUPLEX, SINGLE-MODE, GREEN COUPLING & BOOT & CLIP.
①	A/R	CABLE, OPTICAL FIBER, SINGLE-MODE, G657A, 9/125, DUPLEX, ø2.0mm, TIGHT, YELLOW, PVC JACKET.

PARTS LIST

MATL NOTES
FINISH NOTES
UNIT mm
SHEET 1 OF 1

DRAWN WANGSUFANG DATE 11/26/14'
DESIGN WANGSUFANG DATE 11/26/14'
CHECKED HOSKINS DATE
APPROVED HOSKINS DATE

LYNN

TITLE PATCHCORD, SC/APC-SC/UPC, SM DUPLEX, 9/125, G657A, ø2.0

DRAWING NO. D-SA2SU2-SR2-xxxM
SIZE A3
REV. C